Spaulding | IC Series Impact Crusher

Flexible. Sturdy. Impactful.



Standard Features


- Forged, chrome-moly shaft supported by grease lubricated Koyo roller bearings
- Primary & secondary adjustable curtains with interchangeable, high chrome curtain liners
- Hydraulic curtain clearing & hood opening via independent power unit
- Three crushing paths
- Positive rotor lock for maintenance
- Reversible high chrome blow bars with patented locking design


Optional Equipment

- Electric motor, v-belts, motor sheave

Specifications

Size	Rotor Dia. in. (mm)	Nominal Feed Opening Width x Depth in. (mm)	# Bars	HP	RPM	Weight | lbs. (kg)
IC4036	40 (1,020)	36 x 31 (930x800)	3	100	450-640	22,660 (10,300)
IC4045	40 (1,020)	45 x 31 (1,160x800)	3	150	450-640	25,300 (11,500)
IC4060	40 (1,020)	60 x 31 (1,540x800)	3	150	450-640	29,370 (13,350)
IC5230	52 (1,330)	30 x 42 (778x1,065)	4	100	340-490	25,080 (11,400)
IC5236	52 (1,330)	36 x 42 (930x1,065)	4	150	340-490	30,580 (13,900)
IC5245	52 (1,330)	45 x 42 (1,160x1,065)	4	200	340-490	35,200 (16,000)
IC5260	52 (1,330)	60 x 42 (1,540x1,065)	4	300	340-490	42,900 (19,500)
IC5272	52 (1,330)	73 x 42 (1,844x1,065)	4	300	340-490	48,400 (22,000)

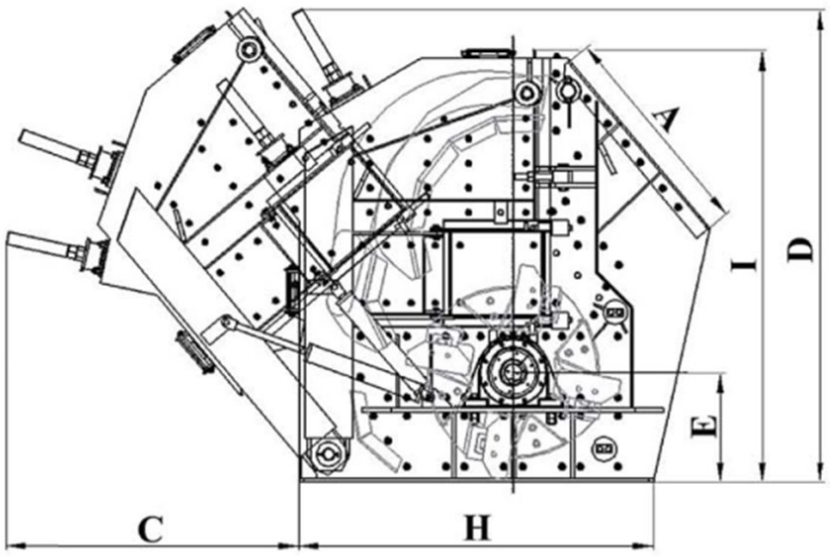

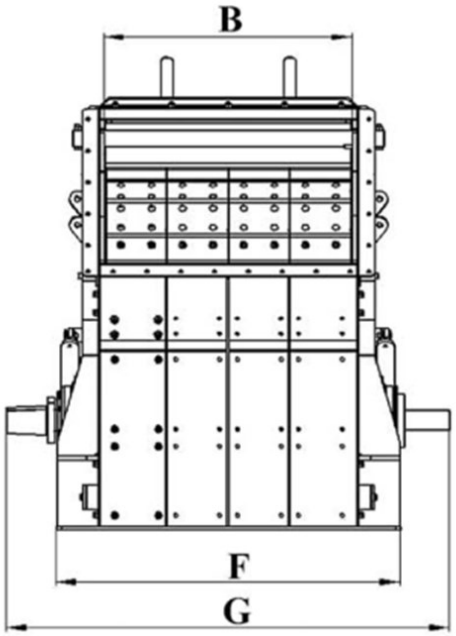

Clearance Dimensions | in. (mm)

Size	A	B	C	D	E	F	G	H	I
IC4036	32 (800)	36-1/2 (930)	58-3/4 (1493)	94-1/2 (2400)	20 (509)	60 (1525)	87 (2210)	70-1/2 (1790)	81 (2055)
IC4045	31-1/2 (800)	45-3/4 (1160)	58-1/2 (1488)	93-3/4 (2382)	20 (509)	69 (1755)	95-3/4 (2430)	70-1/2 (1790)	81 (2055)
IC4060	31-1/2 (800)	60-3/4 (1540)	59-1/4 (1507)	92-3/4 (2355)	20 (509)	84 (2135)	108-1/4 (2750)	70-1/2 (1790)	81 (2055)
IC5230	41-3/4 (1059)	30-3/4 (778)	73 (1851)	116 (2944)	26-3/4 (679)	54 (1372)	80-3/4 (2050)	86-3/4 (2200)	105-1/2 (2676)
IC5236	42 (1065)	36-1/2 (930)	73 (1851)	115-1/4 (2928)	26-3/4 (679)	60 (1524)	87 (2210)	86-3/4 (2200)	105-3/4 (2686)
IC5245	42 (1065)	45-3/4 (1160)	73 (1851)	116 (2944)	26-3/4 (679)	69 (1754)	95-3/4 (2430)	86-3/4 (2200)	105-3/4 (2686)
IC5260	45 (1142)	60-3/4 (1540)	74-1/2 (1890)	115-1/4 (2928)	26-3/4 (679)	84 (2134)	111-1/2 (2830)	86-3/4 (2200)	105-1/2 (2676)
IC5272	42 (1065)	72-1/2 (1844)	73 (1851)	115-1/4 (2927)	26-3/4 (679)	96 (2438)	123-1/4 (3130)	86-3/4 (2200)	105-1/2 (2676)